



## Case study: ext2 FS



1

## The ext2 file system

- Second Extended Filesystem
  - The main Linux FS before ext3
  - Evolved from Minix filesystem (via "Extended Filesystem")
- Features
  - Block size (1024, 2048, and 4096) configured at FS creation
  - inode-based FS
  - Performance optimisations to improve locality (from BSD FFS)
- Main Problem: unclean unmount → **e2fsck**
  - Ext3fs keeps a journal of (meta-data) updates
  - Journal is a file where updates are logged
  - Compatible with ext2fs



2


## Recap: i-nodes

- Each file is represented by an inode on disk
- Inode contains the fundamental file metadata
  - Access rights, owner, accounting info
  - (partial) block index table of a file
- Each inode has a unique number
  - System oriented name
  - Try 'ls -li' on Unix (Linux)
- Directories map file names to inode numbers
  - Map human-oriented to system-oriented names



3

## Recap: i-nodes



4

## Ext2 i-nodes

mode
uid
gid
atime
ctime
mtime
size
block count
reference count
direct blocks (12)
single indirect
double indirect
triple indirect

- Mode
  - Type
    - Regular file or directory
  - Access mode
    - rwxrwxrwx
- Uid
  - User ID
- Gid
  - Group ID



5

## Inode Contents

mode
uid
gid
atime
ctime
mtime
size
block count
reference count
direct blocks (12)
single indirect
double indirect
triple indirect

- atime
  - Time of last access
- ctime
  - Time when file was created
- mtime
  - Time when file was last modified



6

mode
uid
gid
atime
ctime
mtime
size
block count
reference count
direct blocks (12)
single indirect
double indirect
triple indirect

### Inode Contents - Size

- What does 'size of a file' really mean?
  - The space consumed on disk?
    - With or without the metadata?
  - The number of bytes written to the file?
  - The highest byte written to the file?

7

mode
uid
gid
atime
ctime
mtime
size
block count
reference count
direct blocks (12)
single indirect
double indirect
triple indirect

### Inode Contents - Size

- What does 'size of a file' really mean?
  - The space consumed on disk?
    - With or without the metadata?
  - The number of bytes written to the file?
  - The highest byte written to the file?

8

mode
uid
gid
atime
ctime
mtime
size
block count
reference count
direct blocks (12)
single indirect
double indirect
triple indirect

### Inode Contents - Size

- What does 'size of a file' really mean?
  - The space consumed on disk?
    - With or without the metadata?
  - The number of bytes written to the file?
  - The highest byte written to the file?

9

mode
uid
gid
atime
ctime
mtime
size
block count
reference count
direct blocks (12)
single indirect
double indirect
triple indirect

### Inode Contents

- Size
  - Offset of the highest byte written
- Block count
  - Number of disk blocks used by the file.
  - Note that number of blocks can be much less than expected given the file size
- Files can be sparsely populated
  - E.g. write(f, "hello"); lseek(f, 1000000); write(f, "world");
  - Only needs to store the start and end of file, not all the empty blocks in between.
  - Size = 1000005
  - Blocks = 2 + any indirect blocks

10

mode
uid
gid
atime
ctime
mtime
size
block count
reference count
direct blocks (12)
single indirect
double indirect
triple indirect

### Inode Contents

- Direct Blocks
  - Block numbers of first 12 blocks in the file
  - Most files are small
    - We can find blocks of file *directly* from the inode

11

### Problem

- How do we store files with data at offsets greater than 12 blocks?
  - Adding significantly more direct entries in the inode results in many unused entries most of the time.

12

### Inode Contents

- Single Indirect Block
- Block number of a block containing block numbers

mode	17
uid	16
gid	15
atime	14
ctime	13
mtime	12
size	11
block count	10
reference count	9
direct blocks (12)	8
40,58,26,8,12,44,62,30,10,42,3,21	7
single indirect: 32	6
double indirect	5
triple indirect	4
	3
	2
	1
	0

28	0			10				7
29	3	8		4				11
38		2		12	13	7		
46	SI					14		
61	0	9	17	5		15		
43	56	1			16	6	63	

Disk 13

13

### Single Indirection

- Requires two disk access to read
  - One for the indirect block; one for the target block
- Max File Size
  - Assume 1Kbyte block size, 4 byte block numbers
  - $12 * 1K + 1K/4 * 1K = 268 \text{ KiB}$
- For large majority of files (< 268 KiB), given the inode, only one or two further accesses required to read any block in file.

14

### Inode Contents

- Double Indirect Block
- Block number of a block containing block numbers of blocks containing block numbers

mode	
uid	
gid	
atime	
ctime	
mtime	
size	
block count	
reference count	
direct blocks (12)	
40,58,26,8,12,44,62,30,10,42,3,21	
single indirect: 32	
double indirect	
triple indirect	


15

### Inode Contents

- Double Indirect Block
- Block number of a block containing block numbers of blocks containing block numbers
- Triple Indirect
- Block number of a block containing block numbers of blocks containing block numbers of blocks containing block numbers ☺

mode	
uid	
gid	
atime	
ctime	
mtime	
size	
block count	
reference count	
direct blocks (12)	
40,58,26,8,12,44,62,30,10,42,3,21	
single indirect: 32	
double indirect	
triple indirect	

16

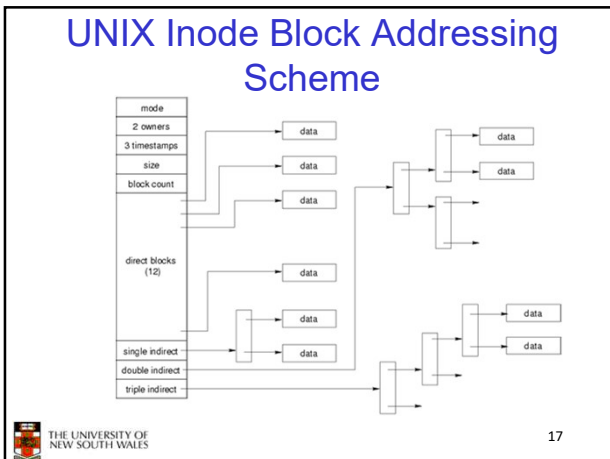


17

### UNIX Inode Block Addressing Scheme

- Assume 8 byte blocks, containing 4 byte block numbers
- => each block can contain 2 block numbers (1-bit index)
- Assume a single direct block number in inode

18

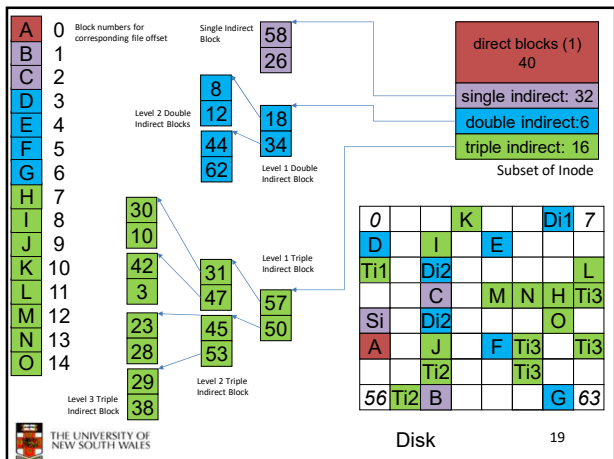

19

## Max File Size


- Assume 4 bytes block numbers and 1K blocks
- The number of addressable blocks
  - Direct Blocks = 12
  - Single Indirect Blocks = 256
  - Double Indirect Blocks = 256 \* 256 = 65536
  - Triple Indirect Blocks = 256 \* 256 \* 256 = 16777216
- Max File Size
 
$$12 + 256 + 65536 + 16777216 = 16843020 \text{ blocks} \approx 16 \text{ GB}$$

20

## Where is the data block number stored?

- Assume 4K blocks, 4 byte block numbers, 12 direct blocks
- A 1 byte file produced by
  - `lseek(fd, 1048576, SEEK_SET) /* 1 megabyte */`
  - `write(fd, "x", 1)`
- What if we add
  - `lseek(fd, 5242880, SEEK_SET) /* 5 megabytes */`
  - `write(fd, "x", 1)`

21

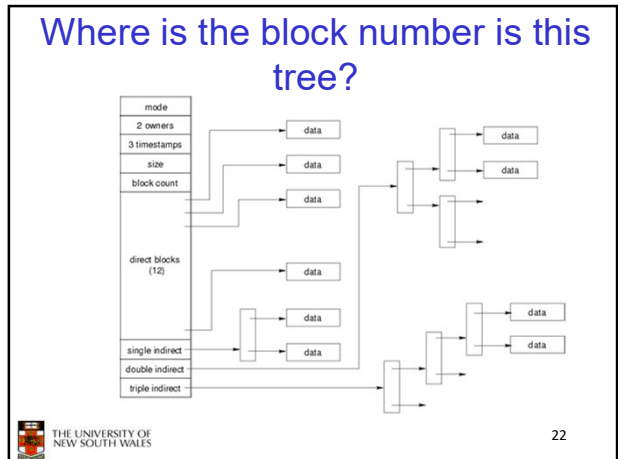

22

## Solution?

4K blocks, 4 byte block numbers => 1024 block numbers in indirect blocks (10 bit index)

Block # range	location
0 --- 11	Direct blocks
12 --- 1035 (11 + 1024)	Single-indirect blocks
1036 --- 1049611 (1035 + 1024 * 1024)	Double-indirect blocks
1049612 --- ????	Triple-indirect blocks

File (not to scale)

23

## Solution

Address = 1048576 ==>  
 block number = 1048576 / 4096 = 256

Single indirect offset = 256 - 12 = 244

Block # range	location
0 --- 11	Direct blocks
12 --- 1035	Single-indirect blocks
1036 --- 1049611	Double-indirect blocks
1049612 --- ????	Triple-indirect blocks

24

### Where is the block number in this tree?

The diagram shows an inode structure with the following fields: mode, 2 owners, 3 timestamps, size, block count, direct blocks (12), single indirect, double indirect, and triple indirect. Each field points to a corresponding data structure. The 244th entry in the direct blocks list is highlighted in yellow.

25

### Solution

Address = 5242880 ==>  
 Block number = 5242880/4096 = 1280  
 Double indirect offset (20-bit) = 1280 - 1036 = 244  
 Top 10 bits = 0  
 Lower 10 bits = 244

Block # range	location
0 --- 11	Direct blocks
12 --- 1035	Single-indirect blocks
1036 --- 1049611	Double-indirect blocks
1049612 --- ????	Triple-indirect blocks

26

### Where is the block number in this tree?

The diagram shows an inode structure with the following fields: mode, 2 owners, 3 timestamps, size, block count, direct blocks (12), single indirect, double indirect, and triple indirect. The 0th entry in the direct blocks list and the 244th entry in the single indirect blocks list are highlighted in yellow.

27

### Some Best and Worst Case Access Patterns

Assume Inode already in memory

- To read 1 byte
  - Best:
    - 1 access via direct block
  - Worst:
    - 4 accesses via the triple indirect block
- To write 1 byte
  - Best:
    - 1 write via direct block (with no previous content)
  - Worst:
    - 4 reads (to get previous contents of block via triple indirect) + 1 write (to write modified block back)

28

### Worst Case Access Patterns with Unallocated Indirect Blocks

- Worst to write 1 byte
  - 4 writes (3 indirect blocks; 1 data)
  - 1 read, 4 writes (read-write 1 indirect, write 2; write 1 data)
  - 2 reads, 3 writes (read 1 indirect, read-write 1 indirect, write 1; write 1 data)
  - 3 reads, 2 writes (read 2, read-write 1; write 1 data)
- Worst to read 1 byte
  - If reading writes a zero-filled block on disk
  - Worst case is same as write 1 byte
  - If not, worst-case depends on how deep is the current indirect block tree.

29

### Inode Summary

- The inode (and indirect blocks) contains the on-disk metadata associated with a file
  - Contains mode, owner, and other bookkeeping
  - Efficient random and sequential access via *indexed allocation*
  - Small files (the majority of files) require only a single access
  - Larger files require progressively more disk accesses for random access
    - Sequential access is still efficient
  - Can support really large files via increasing levels of indirection

30

## Where/How are Inodes Stored



- System V Disk Layout (s5fs)
  - Boot Block
    - contain code to bootstrap the OS
  - Super Block
    - Contains attributes of the file system itself
    - e.g. size, number of inodes, start block of inode array, start of data block area, free inode list, free data block list
  - Inode Array
  - Data blocks



31

31

## Some problems with s5fs

- Inodes at start of disk; data blocks end
  - Long seek times
    - Must read inode before reading data blocks
- Only one superblock
  - Corrupt the superblock and entire file system is lost
- Block allocation was suboptimal
  - Consecutive free block list created at FS format time
    - Allocation and de-allocation eventually randomises the list resulting in random allocation
- Inode free list also randomised over time
  - Directory listing resulted in random inode access patterns



32

32

## Berkeley Fast Filesystem (FFS)


- Historically followed s5fs
- Addressed many limitations with s5fs
- ext2fs mostly similar



33

33

## Layout of an Ext2 FS




- Partition:
  - Reserved boot block,
  - Collection of equally sized *block groups*
  - All block groups have the same structure



34

34

## Layout of a Block Group



- Replicated** super block
  - For e2fsck
- Group descriptors
- Bitmaps identify used inodes/blocks
- All block groups have the same number of data blocks
- Advantages of this structure:
  - Replication simplifies recovery
  - Proximity of inode tables and data blocks (reduces seek time)



35

35

## Superblocks

- Size of the file system, block size and similar parameters
- Overall free inode and block counters
- Data indicating whether file system check is needed:
  - Uncleanly unmounted
  - Inconsistency
  - Certain number of mounts since last check
  - Certain time expired since last check
- Replicated to provide redundancy to aid recoverability**



36

36

## Group Descriptors

- Location of the bitmaps
- Counter for free blocks and inodes in this group
- Number of directories in the group



37

37

## Performance considerations

- EXT2 optimisations
  - Block groups cluster related inodes and data blocks
  - Pre-allocation of blocks on write (up to 8 blocks)
  - 8 bits in bit tables
  - Better contiguity when there are concurrent writes
  - Aim to store files within a directory in the same group



38

38

## Thus far...

- Inodes representing files laid out on disk.
- Inodes are referred to by number!!!
  - How do users name files? By number?



39

39

## Ext2fs Directories

inode	rec_len	name_len	type	name...
-------	---------	----------	------	---------

- Directories are files of a special type
  - Consider it a file of special format, managed by the kernel, that uses most of the same machinery to implement it
    - Inodes, etc...
- Directories translate names to inode numbers
- Directory entries are of variable length
- Entries can be deleted in place
  - inode = 0
  - Add to length of previous entry



40

40

## Ext2fs Directories

- "f1" = inode 7
- "file2" = inode 43
- "f3" = inode 85

Inode No	Rec Length	Name Length	Name
7	12	2	'f' '1' '0' '0'
43	16	5	'f' 'i' 'l' 'e' '2'
85	12	2	'f' '3' '0' '0'
0			



41

41

## Hard links

- Note that inodes can have more than one name
  - Called a *Hard Link*
  - Inode (file) 7 has three names
  - "f1" = inode 7
  - "file2" = inode 7
  - "f3" = inode 7

Inode No	Rec Length	Name Length	Name
7	12	2	'f' '1' '0' '0'
7	16	5	'f' 'i' 'l' 'e' '2'
7	12	2	'f' '3' '0' '0'
0			



42

42

### Inode Contents

mode
uid
gid
atime
ctime
mtime
size
block count
reference count
direct blocks (12) 40,58,26,8,12, 44,62,30,10,42,3,21
single indirect: 32
double indirect
triple indirect

- We can have many names for the same inode.
- When we delete a file by name, i.e. remove the directory entry (link), how does the file system know when to delete the underlying inode?
  - Keep a *reference count* in the inode
  - Adding a name (directory entry) increments the count
  - Removing a name decrements the count
  - If the reference count == 0, then we have no names for the inode (it is unreachable), we can delete the inode (underlying file or directory)

THE UNIVERSITY OF NEW SOUTH WALES 43

43

### Hard links

(a) Situation prior to linking  
 (b) After the link is created  
 (c) After the original owner removes the file

THE UNIVERSITY OF NEW SOUTH WALES 44

44

### Symbolic links

- A symbolic link is a file that contains a reference to another file or directory
  - Has its own inode and data block, which contains a path to the target file
  - Marked by a special file attribute
  - Transparent for some operations
  - Can point across FS boundaries

THE UNIVERSITY OF NEW SOUTH WALES 45

45

### Ext2fs Directories

• Deleting a filename  
–rm file2

7	Inode No
12	Rec Length
2	Name Length
'f' '1' '0' '0'	Name
7	
16	
5	
'f' 'i' 'l' 'e'	
'2' '0' '0' '0'	
7	
12	
2	
'f' '3' '0' '0'	
0	

THE UNIVERSITY OF NEW SOUTH WALES 46

46

### Ext2fs Directories

• Deleting a filename  
–rm file2

• Adjust the record length to skip to next valid entry

7	Inode No
32	Rec Length
2	Name Length
'f' '1' '0' '0'	Name
7	
12	
2	
'f' '3' '0' '0'	
0	

THE UNIVERSITY OF NEW SOUTH WALES 47

47

### FS reliability

- Disk writes are buffered in RAM
  - OS crash or power outage ==> lost data
  - Commit writes to disk periodically (e.g., every 30 sec)
  - Use the `sync` command to force a FS flush
- FS operations are non-atomic
  - Incomplete transaction can leave the FS in an inconsistent state

THE UNIVERSITY OF NEW SOUTH WALES 48

48



### FS reliability

dir entries

i-nodes

data blocks

- Example: deleting a file
  1. Remove the directory entry
  2. Mark the i-node as free
  3. Mark disk blocks as free

49

### FS reliability

dir entries

i-nodes

data blocks

- Example: deleting a file
  1. Remove the directory entry --> crash
  2. Mark the i-node as free
  3. Mark disk blocks as free

The i-node and data blocks are lost

50

### FS reliability

dir entries

i-nodes

data blocks

- Example: deleting a file
  1. Mark the i-node as free --> crash
  2. Remove the directory entry
  3. Mark disk blocks as free

The dir entry points to the wrong file

51

### FS reliability

dir entries

i-nodes

data blocks

- Example: deleting a file
  1. Mark disk blocks as free --> crash
  2. Remove the directory entry
  3. Mark the i-node as free

The file randomly shares disk blocks with other files

52

### FS reliability

- e2fsck
  - Scans the disk after an unclean shutdown and attempts to restore FS invariants
- Journaling file systems
  - Keep a journal of FS updates
  - Before performing an atomic update sequence, write it to the journal
  - Replay the last journal entries upon an unclean shutdown
  - Example: ext3fs

53

54