

Solving the TTC 2011 Model Migration Case with Edapt

Markus Herrmannsdoerfer
Institut für Informatik, Technische Universität München
herrmama@in.tum.de

This paper gives an overview of the Edapt solution to the GMF model migration case [2] of the Transformation Tool Contest 2011.

1 Edapt in a Nutshell

Edapt¹ is a transformation tool tailored for the migration of models in response to metamodel adaptation. Edapt is an official Eclipse tool derived from the research prototype COPE.

Modeling the Coupled Evolution. As depicted by Figure 1, Edapt specifies the metamodel adaptation as a sequence of operations in an explicit history model. The operations can be enriched with instructions for model migration to form so-called coupled operations. Edapt provides two kinds of coupled operations according to the automatability of the model migration [6]: reusable and custom coupled operations.

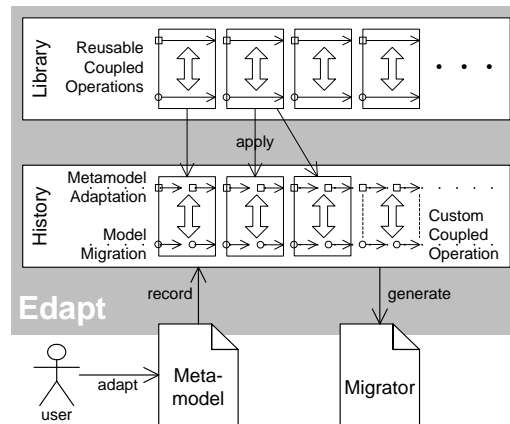


Figure 1: Overview of Edapt

Reuse of recurring migration specifications allows to reduce the effort associated with building a model migration [4]. Edapt thus provides *reusable coupled operations* which make metamodel adaptation and model migration independent of the specific metamodel through parameters and constraints restricting the applicability of the operation. An example for a reusable coupled operation is *Enumeration to Sub Classes* which replaces an enumeration attribute with subclasses for each literal of the enumeration. Currently, Edapt comes with a library of over 60 reusable coupled operations [8]. By means of studying real-life metamodel histories, we have shown that, in practice, most of the coupled evolution can be covered by reusable coupled operations [4, 7].

¹<http://www.eclipse.org/edapt>

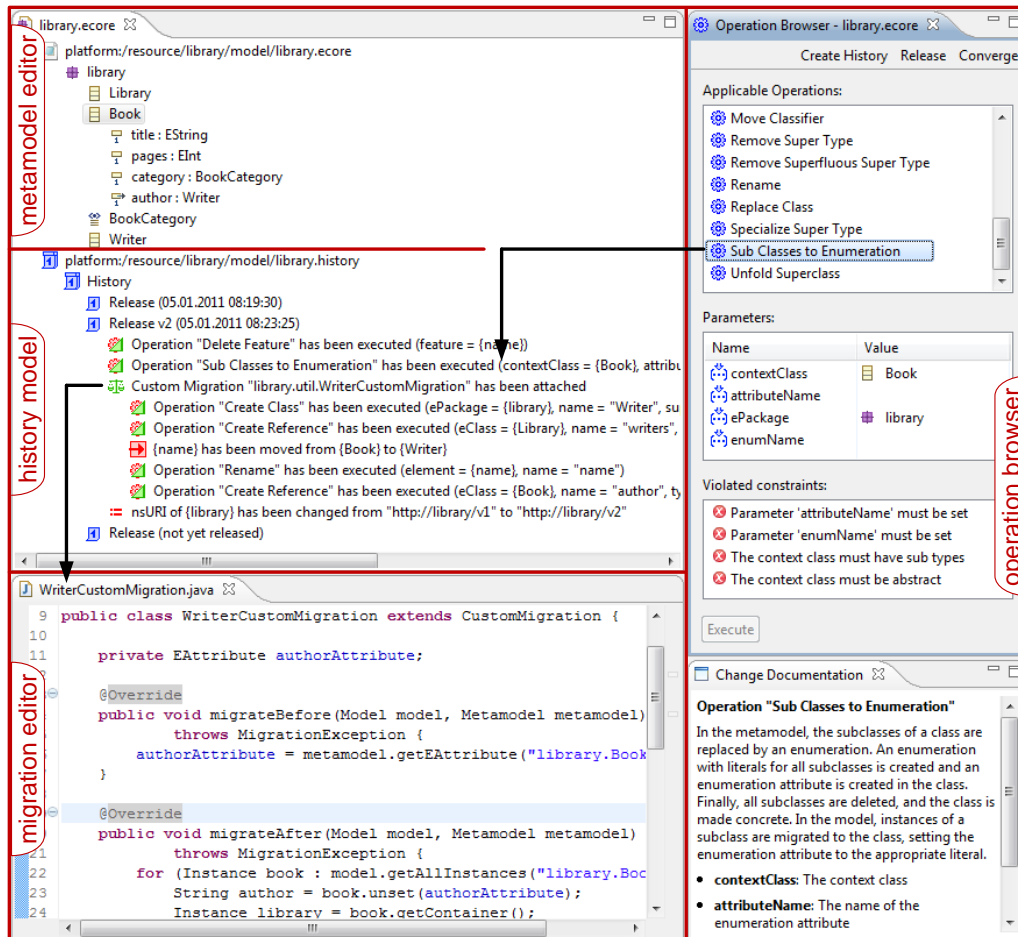


Figure 2: User interface of Edapt

Migration specifications can become so specific to a certain metamodel that reuse does not make sense [4]. To express these complex migrations, Edapt allows the user to define a custom coupled operation by manually encoding a model migration for a metamodel adaptation in a Turing-complete language [5]. By softening the conformance of the model to the metamodel within a coupled operation, both metamodel adaptation and model migration can be specified as in-place transformations, requiring only to specify the difference. A transaction mechanism ensures conformance at the boundaries of the coupled operation.

Recording the Coupled Evolution. To not lose the intention behind the metamodel adaptation, Edapt is intended to be used already when adapting the metamodel. Therefore, Edapt's user interface, which is depicted in Figure 2, is directly integrated into the existing EMF *metamodel editor*. The user interface provides access to the *history model* in which Edapt records the sequence of coupled operations. An initial history can be created for an existing metamodel by invoking *Create History* in the *operation browser* which also allows the user to *Release* the metamodel.

The user can adapt the metamodel by applying reusable coupled operations through the *operation browser*. The operation browser allows to set the parameters of a reusable coupled operation, and gives feedback on the operation's applicability based on the constraints. When a reusable coupled operation

is executed, its application is automatically recorded in the history model. Figure 2 shows the operation Sub Classes to Enumeration being selected in the operation browser and recorded to the history model.

The user needs to perform a custom coupled operation only, in case no reusable coupled operation is available for the change at hand. First, the metamodel is directly adapted in the metamodel editor, in response to which the changes are automatically recorded in the history. A migration can later be attached to the sequence of metamodel changes. Figure 2 shows the *migration editor* to encode the custom migration in Java.

2 GMF Model Migration Case

The complete solution is available through a SHARE demo [3] and in the repository of the Eclipse Edapt project². Here, we only briefly describe the main characteristics of the solution.

Core Task. To build the history model for the GMF Graph metamodel, we took the intermediate metamodel versions from the case resources and applied coupled operations to get from one metamodel version to the next. To know which coupled operations to apply, we used the difference model obtained with EMF Compare³ between two subsequent metamodel versions. Edapt provides the so-called *Convergence View* which automatically updates the difference model after each application of an operation [1].

Table 1 lists the employed coupled operations together with their number of applications. Most of the evolution can be covered by reusable coupled operations. For more information about the reusable coupled operations, we refer the reader to [8]. Section A.1 of the appendix shows the screenshot of the history model from release 1.0 to 2.1. The history model also contains markers for the different metamodel versions. Only two custom coupled operations are necessary to specify a correct model migration. The first custom migration is necessary to initialize a reference that was made mandatory. The second custom migration decouples the diagram elements from the figures to make the figures reusable. The custom migrations which are implemented in Java can be found in Sections A.3 and A.4 of the appendix of this paper.

Multi-File Models. Edapt can migrate multi-file models, as it preserves the modularization into files throughout the migration. If one file refers to the other, the second file is automatically loaded when resolving references. However, a user can also explicitly define that several files are migrated together.

GMF Map metamodel. To build the history model for the GMF Map metamodel, we applied the same procedure as in case of the GMF Graph metamodel. Table 2 lists the employed coupled operations together with their number of applications. The complete coupled evolution can be covered by reusable coupled operations. For more information about the reusable coupled operations, we refer the reader to [8]. The screenshots of the resulting history model are depicted in Section A.2 of the appendix: One screenshot shows the coupled operations from release 1.0 to 2.0, and another one the operations from release 2.0 to 2.1.

As one can see, the history model is modularized into different releases. Based on the namespace URI, Edapt automatically detects of which release a model is and applies the coupled operations from this release to the newest release. Moreover, the history model can be recorded for metamodels that refer to other metamodels. However, to be able to load the models, the other metamodels need to be available during migration. In the solution, we ensured this by starting the migration in an Eclipse workbench where the other metamodels are available through plugins.

²http://dev.eclipse.org/svnroot/modeling/org.eclipse.emft.edapt/trunk/examples/ttc_gmf

³<http://www.eclipse.org/emf/compare/>

Table 1: GMF Graph

Operation	Kind	Number
Add Super Type	Reusable	10
Change Namespace URI	Reusable	1
Create Attribute	Reusable	2
Create Class	Reusable	4
Create Reference	Reusable	5
Delete Feature	Reusable	4
Delete Operation	Reusable	1
Document Metamodel Element	Reusable	12
Drop Attribute Identifier	Reusable	1
Extract Super Class	Reusable	3
Generalize Attribute	Reusable	1
Generalize Reference	Reusable	1
Inline Super Class	Reusable	2
Make Class Abstract when Interface	Reusable	14
Make Reference Containment	Reusable	1
Not Changeable to Suppressed Set Visibility	Reusable	1
Push Down Feature	Reusable	4
Remove Super Type	Reusable	10
Specialize Reference Type	Reusable	4
Specialize Super Type	Reusable	6
Suppressed Set Visibility to Not Changeable	Reusable	1
Unfold Super Class	Reusable	1
Initialize FigureAccessor.typedFigure	Custom	1
Decouple FigureHandle.referenceingElements	Custom	1

3 Conclusion

Expressiveness. The language provided by Edapt is expressive enough to specify the migration. Most of the migration can be covered by reusable coupled operations. For more complex migrations, custom coupled operations can be specified in Java. The API provided to specify the custom coupled operations turned out to be expressive enough to cover the complex migrations involved in the GMF Graph metamodel evolution.

Correctness. To ensure correctness, we used the test models from the case resources. We modified the history model until there are no differences between the migrated model and the expected model. To obtain the differences, we used EMF Compare. We ignored differences in the order of references, since we believe that the order is not important for the GMF Graph and Map models.

Conciseness. The migration specification is rather concise, since most of the evolution can be covered by reusable coupled operations. Only two custom coupled operations are required: one with 21 and another one with 90 lines of custom migration code. Considering the complexity of the second migration, we consider the migration specification as concise. However, conciseness could be improved by providing a DSL instead of a Java API to implement migrations.

Maintainability. The history model is easy to understand, since it is modularized into rather small coupled operations. Intermediate metamodel versions can be reconstructed from the history model, thus simulating the evolution. Moreover, coupled operations can be undone to revert changes that have been performed erroneously, and custom migrations can be removed, edited and added to fix error-prone migrations. Finally, existing history models can be extended by recording new coupled operations that

Table 2: GMF Map

Operation	Kind	Number
Change GMF Constraint	Reusable	5
Change Namespace URI	Reusable	3
Create Annotation	Reusable	1
Create Attribute	Reusable	3
Create Class	Reusable	2
Create Enumeration	Reusable	3
Create GMF Constraint	Reusable	6
Create Reference	Reusable	3
Delete Annotation	Reusable	2
Document Metamodel Element	Reusable	12
Extract Subclass	Reusable	1
Extract Super Class	Reusable	1
Inheritance to Delegation	Reusable	1
Make Class Abstract when Interface	Reusable	10
Make Feature Volatile	Reusable	1
Move Annotation	Reusable	1
Not Changeable to Suppressed Set Visibility	Reusable	5
Push down Feature	Reusable	2
Replace Enumeration	Reusable	2
Suppressed Set Visibility to Not Changeable	Reusable	5

are applied to the metamodel.

References










































































- [1] Markus Herrmannsdoerfer (2010): *COPE - A Workbench for the Coupled Evolution of Metamodels and Models*. In: *SLE '10*.
- [2] Markus Herrmannsdoerfer (2011): *GMF: A Model Migration Case for the Transformation Tool Contest*. In Van Gorp et al. [9].
- [3] Markus Herrmannsdoerfer (2011): *SHARE demo related to the paper Solving the TTC 2011 Model Migration Case with Edapt*. In Van Gorp et al. [9]. Available at http://is.ieis.tue.nl/staff/pvgorp/share/?page=ConfigureNewSession&vdi=XP-TUe_TTC11_EMFEdapt.vdi.
- [4] Markus Herrmannsdoerfer, Sebastian Benz & Elmar Juergens (2008): *Automatability of Coupled Evolution of Metamodels and Models in Practice*. In: *MoDELS '08*, doi:10.1007/978-3-540-87875-9_45.
- [5] Markus Herrmannsdoerfer, Sebastian Benz & Elmar Juergens (2008): *COPE: A Language for the Coupled Evolution of Metamodels and Models*. In: *MCCM '08*.
- [6] Markus Herrmannsdoerfer, Sebastian Benz & Elmar Juergens (2009): *COPE - Automating Coupled Evolution of Metamodels and Models*. In: *ECOOP '09*, doi:10.1007/978-3-642-03013-0_4.
- [7] Markus Herrmannsdoerfer, Daniel Ratiu & Guido Wachsmuth (2009): *Language Evolution in Practice: The History of GMF*. In: *SLE '09*, doi:10.1007/978-3-642-12107-4_3.
- [8] Markus Herrmannsdoerfer, Sander Vermolen & Guido Wachsmuth (2010): *An Extensive Catalog of Operators for the Coupled Evolution of Metamodels and Models*. In: *SLE '10*, doi:10.1007/978-3-642-19440-5_10.
- [9] Pieter Van Gorp, Steffen Mazanek & Louis Rose, editors (2011): *TTC 2011: Fifth Transformation Tool Contest, Zürich, Switzerland, June 29-30 2011, Post-Proceedings*. EPTCS.

A Solution

A.1 GMF Graph History

- ▶ Release 1.0 (08.02.2009 12:16:45)
- ▶ Release 2.1 (08.02.2009 19:53:06)
 - ▶ Operation "Create Class" has been executed (ePackage = {gmfgraph}, name = "ScalablePolygon", superClasses = [{Polygon}], abstr = false)
 - ▶ Operation "Document Metamodel Element" has been executed (element = {ScalablePolygon}, documentation = "Marker interface to denote polygons with ability to")
 - ▶ No Change 1.24
 - ▶ Operation "Create Attribute" has been executed (eClass = {Node}, name = "affixedParentSide", type = {Direction}, lowerBound = 0, upperBound = 1, defaultValue = " ")
 - ▶ No Change 1.25
 - ▶ Operation "Create Class" has been executed (ePackage = {gmfgraph}, name = "DefaultSizeFacet", superClasses = [{VisualFacet}], abstr = false)
 - ▶ Operation "Create Reference" has been executed (eClass = {DefaultSizeFacet}, name = "defaultSize", type = {Dimension}, lowerBound = 0, upperBound = 1, containment = true)
 - ▶ No Change 1.26
 - ▶ Composite Change
 - ▶ No Change 1.27
 - ▶ Composite Change
 - ▶ No Change 1.28
 - ▶ Composite Change
 - ▶ No Change 1.29
 - ▶ Operation "Extract Super Class" has been executed (subClass = {Node}, toExtract = [], ePackage = {gmfgraph}, superClassName = "AbstractNode", abstr = true, super = {Node})
 - ▶ Operation "Extract Super Class" has been executed (subClass = {ConnectionFigure}, toExtract = [], ePackage = {gmfgraph}, superClassName = "RealFigure", abstr = true, super = {RealFigure})
 - ▶ Operation "Specialize Super Type" has been executed (eClass = {DecorationFigure}, toReplace = {Figure}, replaceBy = {RealFigure})
 - ▶ Operation "Specialize Super Type" has been executed (eClass = {Shape}, toReplace = {Figure}, replaceBy = {RealFigure})
 - ▶ Operation "Specialize Super Type" has been executed (eClass = {Label}, toReplace = {Figure}, replaceBy = {RealFigure})
 - ▶ Operation "Specialize Super Type" has been executed (eClass = {LabeledContainer}, toReplace = {Figure}, replaceBy = {RealFigure})
 - ▶ Operation "Specialize Super Type" has been executed (eClass = {CustomFigure}, toReplace = {Figure}, replaceBy = {RealFigure})
 - ▶ Operation "Document Metamodel Element" has been executed (element = {RealFigure}, documentation = "This is exact/specific/concrete figure, unlike proxy/refere")
 - ▶ Operation "Extract Super Class" has been executed (subClass = {RealFigure}, toExtract = [], ePackage = {gmfgraph}, superClassName = "AbstractFigure", abstr = true, super = {RealFigure})
 - ▶ Operation "Document Metamodel Element" has been executed (element = {AbstractFigure}, documentation = "This is merely an implementation artifact to get only")
 - ▶ Operation "Push down Feature" has been executed (feature = {children})
 - ▶ Operation "Push down Feature" has been executed (feature = {children})
 - ▶ Operation "Unfold Superclass" has been executed (subClass = {Figure}, superClass = {Identity})
 - ▶ Operation "Push down Feature" has been executed (feature = {name})
 - ▶ Operation "Push down Feature" has been executed (feature = {name})
 - ▶ Operation "Generalize Attribute" has been executed (attribute = {name}, lowerBound = null, upperBound = 1)
 - ▶ id of {name} has been changed from true to false
 - ▶ Operation "Specialize Reference Type" has been executed (reference = {figure}, type = {AbstractFigure})
 - ▶ Operation "Specialize Reference Type" has been executed (reference = {figure}, type = {RealFigure})
 - ▶ Operation "Document Metamodel Element" has been executed (element = {figure}, documentation = "not just Figure because don't want to reference figure referen")
 - ▶ Operation "Specialize Reference Type" has been executed (reference = {figures}, type = {AbstractFigure})
 - ▶ Operation "Specialize Reference Type" has been executed (reference = {figures}, type = {RealFigure})
 - ▶ Operation "Specialize Super Type" has been executed (eClass = {FigureRef}, toReplace = {FigureMarker}, replaceBy = {AbstractFigure})
 - ▶ Operation "Inline Super Class" has been executed (superClass = {FigureMarker})
 - ▶ Operation "Delete Feature" has been executed (feature = {parent})
 - ▶ Operation "Document Metamodel Element" has been executed (element = {Figure}, documentation = "Anything you could combine visual representation from. Ore")
 - ▶ Operation "Document Metamodel Element" has been executed (element = {customChildren}, documentation = "Childrent enumerated with this feature are mere 'ac")
 - ▶ EAttribute (external) has been created in {DiagramLabel}
 - ▶ Operation "Delete Feature" has been executed (feature = {nodeFigure})
 - ▶ Operation "Delete Feature" has been executed (feature = {connectionFigure})
 - ▶ Operation "Delete Feature" has been executed (feature = {bundleName})
 - ▶ EOperation (find) has been deleted from {DiagramElement}
 - ▶ Operation "Generalize Reference" has been executed (reference = {typedFigure}, type = {RealFigure}, lowerBound = 0, upperBound = 1)
 - ▶ Operation "Make Reference Containment" has been executed (reference = {typedFigure})
 - ▶ Custom Migration "GMFGraphTypedFigureCustomMigration" has been attached
 - ▶ lowerBound of {typedFigure} has been changed from 0 to 1
 - ▶ Custom Migration "GMFGraphFigureDescriptorCustomMigration" has been attached
 - ▶ Composite Change
 - ▶ EReference (accessor) has been created in {Compartment}
 - ▶ EReference (accessor) has been created in {DiagramLabel}
 - ▶ EReference (contentPane) has been created in {Node}
 - ▶ EReference (descriptors) has been created in {FigureGallery}
 - ▶ EReference (descriptor) has been created in {Figure}
 - ▶ EReference (container) has been created in {DiagramLabel}
 - ▶ EReference (referencingElements) has been deleted from {FigureHandle}
 - ▶ eType of {figure} has been changed from {FigureHandle} to {FigureDescriptor}
 - ▶ Operation "Inline Super Class" has been executed (superClass = {FigureHandle})
 - ▶ nsURI of {gmfgraph} has been changed from "http://www.eclipse.org/gmf/2005/GraphicalDefinition" to "http://www.eclipse.org/gmf/2006/GraphicalDefinition"
 - ▶ No Change 1.30
 - ▶ Operation "Not Changeable to Suppressed Set Visibility" has been executed (reference = {owner})
 - ▶ resolveProxies of {owner} has been changed from true to false
 - ▶ No Change 1.31
 - ▶ Operation "Suppressed Set Visibility to Not Changeable" has been executed (reference = {owner})
 - ▶ No Change 1.32
 - ▶ Operation "Create Class" has been executed (ePackage = {gmfgraph}, name = "BorderRef", superClasses = [{Border}], abstr = false)
 - ▶ Operation "Document Metamodel Element" has been executed (element = {BorderRef}, documentation = "Border reuse mechanism")
 - ▶ Operation "Create Reference" has been executed (eClass = {BorderRef}, name = "actual", type = {Border}, lowerBound = 1, upperBound = 1, containment = false, opp = {BorderRef})
 - ▶ Operation "Document Metamodel Element" has been executed (element = {actual}, documentation = "constraint: actual should not be another BorderRef")
 - ▶ Operation "Create Class" has been executed (ePackage = {gmfgraph}, name = "LayoutRef", superClasses = [{Layout}], abstr = false)
 - ▶ Operation "Document Metamodel Element" has been executed (element = {LayoutRef}, documentation = "Layout reuse mechanism")
 - ▶ Operation "Create Reference" has been executed (eClass = {LayoutRef}, name = "actual", type = {Layout}, lowerBound = 1, upperBound = 1, containment = false, opp = {LayoutRef})
 - ▶ Operation "Document Metamodel Element" has been executed (element = {actual}, documentation = "constraint: actual should not be another LayoutRef")
 - ▶ Operation "Create Reference" has been executed (eClass = {FigureGallery}, name = "borders", type = {Border}, lowerBound = 0, upperBound = -1, containment = true)
 - ▶ Operation "Document Metamodel Element" has been executed (element = {borders}, documentation = "Borders for reuse")
 - ▶ Operation "Create Reference" has been executed (eClass = {FigureGallery}, name = "layouts", type = {Layout}, lowerBound = 0, upperBound = -1, containment = true)
 - ▶ Operation "Document Metamodel Element" has been executed (element = {layouts}, documentation = "Layouts for reuse")
 - ▶ No Change 1.33
 - ▶ Release (not yet released)

A.2 GMF Map History

- ▶  Release 1.0 (09.02.2009 23:34:41)
- ▶  Release 2.0 (10.02.2009 00:03:13)
 - ▶  Operation "Create GMF Constraint" has been executed (element = {ChildReference}, ocl = "let child:NodeMapping=(if ownedChild.oclsUndefined() then referenc")
 - ▶  Operation "Create GMF Constraint" has been executed (element = {ChildReference}, ocl = "let child:NodeMapping=(if ownedChild.oclsUndefined() then referenc")
 - ▶  No Change 1.44
 - ▶  Composite Change
 - ▶  No Change 1.45
 - ▶  Operation "Extract Super Class" has been executed (subClass = {FeatureValueSpec}, toExtract = [{feature}, {featureSeqInitializer}], ePackage = {mappings}, superClass = {FeatureValueSpec})
 - ▶  Operation "Create GMF Constraint" has been executed (element = {feature}, ocl = "feature <> null implies feature.eContainingClass.isSuperTypeOf(featureSeqInit")
 - ▶  Operation "Create GMF Constraint" has been executed (element = {feature}, ocl = "feature <> null implies feature.changeable", description = "The 'feature' of 'Fe")
 - ▶  Operation "Document Metamodel Element" has been executed (element = {feature}, documentation = "The feature for which is to be initialized by this initializer")
 - ▶  Operation "Create Class" has been executed (ePackage = {mappings}, name = "ReferenceNewElementSpec", superClasses = [{FeatureSeqInitializer}], abstr = false)
 - ▶  Operation "Create Reference" has been executed (eClass = {FeatureSeqInitializer}, name = "creatingInitializer", type = {ReferenceNewElementSpec}, lowerBound = 0, upperBound = 1)
 - ▶  Operation "Create GMF Constraint" has been executed (element = {ReferenceNewElementSpec}, ocl = "feature.many = false implies not (newElementInitializers->")
 - ▶  Operation "Create Reference" has been executed (eClass = {ReferenceNewElementSpec}, name = "newElementInitializers", type = {FeatureSeqInitializer}, lowerBound = 0, upperBound = 1)
 - ▶  Composite Change
 - ▶  Operation "Create GMF Constraint" has been executed (element = {elementClass}, ocl = "not creatingInitializer.feature.oclsUndefined() implies creatingInitializer")
 - ▶  Operation "Create GMF Constraint" has been executed (element = {elementClass}, ocl = "not creatingInitializer.feature.oclsUndefined() implies not (elementClass")
 - ▶  Operation "Document Metamodel Element" has been executed (element = {FeatureSeqInitializer}, documentation = "Feature sequence initializer to initialize a seq")
 - ▶  Operation "Make Feature Volatile" has been executed (feature = {mappingEntry}, trans = true, derived = false, changeable = false)
 - ▶  Composite Change
 - ▶  Operation "Document Metamodel Element" has been executed (element = {mappingEntry}, documentation = "The 'MappingEntry' whose domain model element")
 - ▶  Operation "Document Metamodel Element" has been executed (element = {relatedDiagrams}, documentation = "Diagrams that may be associated with this diagr")
 - ▶  No Change 1.47
 - ▶  Operation "Create Reference" has been executed (eClass = {MappingEntry}, name = "relatedDiagrams", type = {CanvasMapping}, lowerBound = 0, upperBound = 1)
 - ▶  Operation "Document Metamodel Element" has been executed (element = {relatedDiagrams}, documentation = "Diagrams that may be associated with this diagr")
 - ▶  No Change 1.48
 - ▶  Operation "Extract Subclass" has been executed (superClass = {LabelMapping}, feature = {features}, className = "FeatureLabelMapping")
 - ▶  Operation "Push down Feature" has been executed (feature = {viewPattern})
 - ▶  Operation "Push down Feature" has been executed (feature = {editPattern})
 - ▶  Operation "Document Metamodel Element" has been executed (element = {FeatureLabelMapping}, documentation = "Label based on feature(s) from domain mo")
 - ▶  Operation "Document Metamodel Element" has been executed (element = {viewPattern}, documentation = "Pattern for java.text.MessageFormat to produce labe")
 - ▶  Operation "Document Metamodel Element" has been executed (element = {LabelMapping}, documentation = "Label definition; text is taken from the graph mod")
 - ▶  Operation "Create Class" has been executed (ePackage = {mappings}, name = "DesignLabelMapping", superClasses = [{LabelMapping}], abstr = false)
 - ▶  Operation "Document Metamodel Element" has been executed (element = {DesignLabelMapping}, documentation = "Label based on DescriptionStyle from notat")
 - ▶  No Change 1.49
 - ▶  Composite Change
 - ▶  No Change 1.50
 - ▶  Operation "Create Enumeration" has been executed (ePackage = {mappings}, name = "LabelEditMethod", literals = [{"MESSAGE_FORMAT", "REGEXP", "NATIVE"}])
 - ▶  Operation "Create Enumeration" has been executed (ePackage = {mappings}, name = "LabelViewMethod", literals = [{"MESSAGE_FORMAT", "PRINTF", "NATIVE"}])
 - ▶  Operation "Create Attribute" has been executed (eClass = {FeatureLabelMapping}, name = "editMethod", type = {LabelEditMethod}, lowerBound = 0, upperBound = 1)
 - ▶  Operation "Create Attribute" has been executed (eClass = {FeatureLabelMapping}, name = "viewMethod", type = {LabelViewMethod}, lowerBound = 0, upperBound = 1)
 - ▶  Operation "Document Metamodel Element" has been executed (element = {viewPattern}, documentation = "Pattern to produce label on diagram, depends on vie")
 - ▶  Operation "Document Metamodel Element" has been executed (element = {editPattern}, documentation = "Pattern to produce text for inplace editor, depends or")
 - ▶  No Change 1.51
 - ▶  Operation "Create Enumeration" has been executed (ePackage = {mappings}, name = "LabelTextAccessMethod", literals = [{"MESSAGE_FORMAT", "NATIVE", "REGEXP"}])
 - ▶  Operation "Replace Enumeration" has been executed (toReplace = {LabelEditMethod}, replaceBy = {LabelTextAccessMethod}, literalsToReplace = [{"MESSAGE_FORMAT", "NATIVE", "REGEXP"}])
 - ▶  Operation "Replace Enumeration" has been executed (toReplace = {LabelViewMethod}, replaceBy = {LabelTextAccessMethod}, literalsToReplace = [{"MESSAGE_FORMAT", "PRINTF", "NATIVE"}])
 - ▶  No Change 1.52
 - ▶  Operation "Create Attribute" has been executed (eClass = {FeatureLabelMapping}, name = "editorPattern", type = {EString}, lowerBound = 0, upperBound = 1, defaultValue = "edit")
 - ▶  Operation "Document Metamodel Element" has been executed (element = {editorPattern}, documentation = "Pattern to produce text for inplace editor, depends")
 - ▶  Operation "Document Metamodel Element" has been executed (element = {editPattern}, documentation = "Pattern to extract values from input text, depends on")
 - ▶  No Change 1.53
 - ▶  Operation "Document Metamodel Element" has been executed (element = {editPattern}, documentation = "Pattern to extract values from input text, depends on")
 - ▶  nsURI of {mappings} has been changed from "http://www.eclipse.org/gmf/2005/mappings/2.0" to "http://www.eclipse.org/gmf/2006/mappings"
 - ▶  No Change 1.54
- ▶  Release 2.1 (10.02.2009 00:07:59)
 - ▶  Operation "Not Changeable to Suppressed Set Visibility" has been executed (reference = {parentNode})
 - ▶  Operation "Not Changeable to Suppressed Set Visibility" has been executed (reference = {featureSeqInitializer})
 - ▶  Operation "Not Changeable to Suppressed Set Visibility" has been executed (reference = {linkMapping})
 - ▶  Operation "Not Changeable to Suppressed Set Visibility" has been executed (reference = {mapEntry})
 - ▶  Operation "Not Changeable to Suppressed Set Visibility" has been executed (reference = {creatingInitializer})
 - ▶  Composite Change
 - ▶  No Change 1.55
 - ▶  Operation "Inheritance to Delegation" has been executed (subClass = {FeatureValueSpec}, superClass = {ValueExpression}, referenceName = "value")
 - ▶  Composite Change
 - ▶  No Change 1.56
 - ▶  Operation "Suppressed Set Visibility to Not Changeable" has been executed (reference = {parentNode})
 - ▶  Operation "Suppressed Set Visibility to Not Changeable" has been executed (reference = {featureSeqInitializer})
 - ▶  Operation "Suppressed Set Visibility to Not Changeable" has been executed (reference = {linkMapping})
 - ▶  Operation "Suppressed Set Visibility to Not Changeable" has been executed (reference = {mapEntry})
 - ▶  Operation "Suppressed Set Visibility to Not Changeable" has been executed (reference = {creatingInitializer})
 - ▶  No Change 1.58


```

38         }
39     }
40 }
41 }
42 }
43 }
44
45 public Instance getToplevel(Instance handle) {
46     while (handle.getContainer().instanceOf("gmfgraph.FigureHandle")) {
47         handle = handle.getContainer();
48     }
49     return handle;
50 }
51
52 public Instance getOrCreateDescriptor(Instance toplevel, Model model) {
53     Instance gallery = toplevel.getContainer();
54     if (gallery.instanceOf("gmfgraph.FigureDescriptor")) {
55         return gallery;
56     }
57     Instance descriptor = model.newInstance("gmfgraph.FigureDescriptor");
58     descriptor.set("actualFigure", toplevel);
59     gallery.remove("figures", toplevel);
60     gallery.add("descriptors", descriptor);
61     descriptor.set("name", toplevel.get("name"));
62     return descriptor;
63 }
64
65 public Instance getOrCreateAccess(Instance descriptor, Instance handle) {
66     Instance figure = null;
67     if (handle.instanceOf("gmfgraph.FigureAccessor")) {
68         figure = handle.getLink("typedFigure");
69     } else {
70         figure = handle;
71     }
72     Instance access = findAccess(descriptor, figure);
73     if (access == null) {
74         access = descriptor.getType().getModel()
75             .newInstance("gmfgraph.ChildAccess");
76         access.set("figure", figure);
77         descriptor.add("accessors", access);
78     }
79     return access;
80 }
81
82 public Instance findAccess(Instance descriptor, Instance figure) {
83     for (Instance access : descriptor.getLinks("accessors")) {
84         if (access.get("figure") == figure) {
85             return access;
86         }
87     }
88     return null;
89 }
90 }

```